


# Pit LED light M series

## Features

- Super-bright LED lights
- 2 LED boards that can be operated separately
- Exterior driver (fixture has max 40VDC)
- Housing: heavy-duty body, acrylic lens, cast aluminum end plates, rotating arm, mount on conduit (not included)
- mounting allows 135 degrees of rotation for easy aiming (includes locking mechanism)

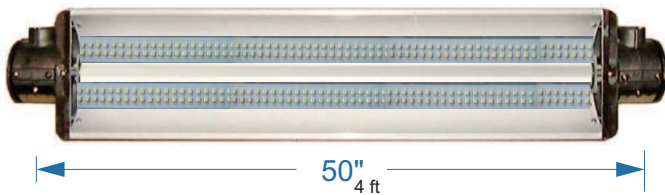

## Description

For pit illumination. The lamp can be adjusted to achieve minimal glare and optimal illumination of the undercarriage of a vehicle. The Lamp comes fitted with 2 led rows that can be individually switched on. If both rows are switched on, the brightness is equivalent to the brightness of 3 fluorescent tubes.

## Specifications

<b>Input Voltage</b>	110 - 277 VAC
<b>Operating Temp.</b>	0°F to 125°F
<b>IP Rating</b>	IP 30
<b>Color Temp.</b>	6,000K
<b>Power</b>	2 x 20W
<b>Rated Life (L<sub>70</sub>)</b>	25,000 Hours
<b>Power Factor</b>	0.86
<b>Warranty</b>	2 Year Limited



## Product Details

Code	Length	Power	Lumens	CCT	CRI
RM22	2ft	20W	2,100	6000K	80
RM42	4ft	40W	4,400	6000K	80



**After**

(light in a train pit with both LED rows switched on)